



Laminated Oak Plywood



Supporting Pin Type



The Internal Spring



Stage Joint



FSA-060




The height of the stage of FSA-060 can be changed by merely operating the release lever under the stage floor.



<b>FEA-064(Dolly)</b>	<b>For FSA-060</b>
Upper board	Lauan plywood
Frame	with clear lacquer coating
Stackable Qty	Square steel pipe 5 Stages


**Movable Stage Height H (mm)**

H1	200 mm
H2	400 mm
H3	600 mm
H4	800 mm
H5	1000 mm



2000

1000

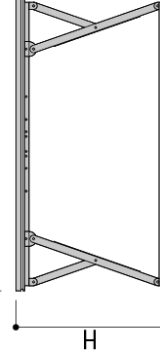

GL



Kotobuki-Sea Standard Product

FSA-060, S=1/50  
※Please note that specifications may change without prior notice!

**Specifications**

**Movable Stage**

**FSA-060 (Removable Type)**

Stage Floor	Laminated oak flooring plywood
Stage Frame/ Leg	Extruded molding aluminum alloy
Weight	with alumite coating (Silver) 70 kg
Maximum live load	750kg / m <sup>2</sup>

**FSA-060**

